


MALE CONNECTOR

TFM

展毅自动控制有限公司

SAE straight thread boss connects flared tube ends to TAPER thread NPT

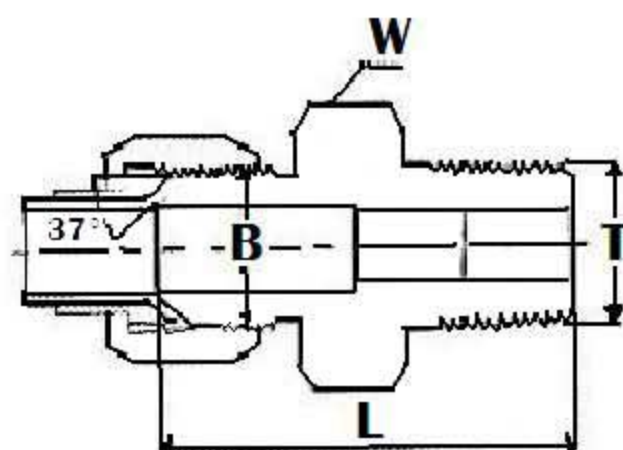

NO.	TUBE O.D	B	T	W	L	
	inch	JIC(AN)	NPT	inch	inch	MM
TFM 20-20	1/8	5/16-24	1/8-27	7/16	1.11	28.2
TFM 30-20	3/16	3/8-24	1/8-27	7/16	1.14	29.0
TFM 40-20	1/4	7/16-20	1/8-27	1/2	1.22	31.0
TFM 40-40	1/4	7/16-20	1/4-18	9/16	1.42	36.0
TFM 40-80	1/4	7/16-20	1/2-14	7/8	1.61	41.0
TFM 50-20	5/16	1/2-20	1/8-27	9/16	1.22	31.0
TFM 50-40	5/16	1/2-20	1/4-18	9/16	1.42	36.1
TFM 60-20	3/8	9/16-18	1/8-27	5/8	1.25	31.8
TFM 60-40	3/8	9/16-18	1/4-18	5/8	1.43	36.3
TFM 60-60	3/8	9/16-18	3/8-18	3/4	1.43	36.3
TFM 60-80	3/8	9/16-18	1/2-14	7/8	1.69	42.5
TFM 80-40	1/2	3/4-16	1/4-18	13/16	1.53	38.9
TFM 80-60	1/2	3/4-16	3/8-18	13/16	1.53	38.9
TFM 80-80	1/2	3/4-16	1/2-14	7/8	1.79	43.6
TFM 80-120	1/2	3/4-16	3/4-14	1-1/8	1.85	47.0
TFM 100-60	5/8	7/8-14	3/8-18	15/16	1.70	43.1
TFM 100-80	5/8	7/8-14	1/2-14	15/16	1.89	48.0
TFM 100-120	5/8	7/8-14	3/4-14	1-1/8	1.95	49.5
TFM 120-120	3/4	1-1/16-12	3/4-14	1-1/8	2.06	52.3
TFM 120-160	3/4	1-1/16-12	1-11.5	1-3/8	2.25	57.1
TFM 140-120	7/8	1-3/16-12	3/4-14	1-1/4	2.09	53.1
TFM 160-120	1	1-5/16-12	3/4-14	1-3/8	2.11	53.5
TFM 160-160	1	1-5/16-12	1-11.5	1-3/8	2.30	58.4